

MODEL 783 SMB - SURFACE MOUNT BOX

INSTALLATION INSTRUCTIONS

Please read carefully before attempting installation

DIMENSIONS:
INCH/MM

Hanchett Entry Systems, Inc.
22630 N. 17th Ave.
Phoenix, AZ 85027
www.hesinnovations.com

hes

Technical Service Dept. Helpline 800-626-7590

INSTALLATION:

1. Begin by preparing the door for installation by drilling the mounting holes and stringing the power wires as shown in figure 1. The wires from inside the door must surface through the hole labeled 'HOLE FOR WIRES'.
2. Install the Surface Mount Box to the door using the door mounting screws and acorn nuts as shown in figure 2.
3. Connect the power wires to the electric strike as shown in figure 2.
4. Mount the electric strike to the Surface Mount Box using the Strike Mounting Screws as shown in figure 2. Be sure to center the keeper in the cutout prior to tightening the Mounting Screws.

The Surface Mount Box comes with Door Mounting Screws which are 2-14" (57.17mm) long. If the install in the door is thinner than standard (approx. 1-3/4" (44.45mm), it may be necessary to cut a portportion off the end of the screw so the Acorn Nuts will tighten against the door properly. If, however the installation door is thicker than standard, longer bolts will be needed. HES does not stock longer bolts.

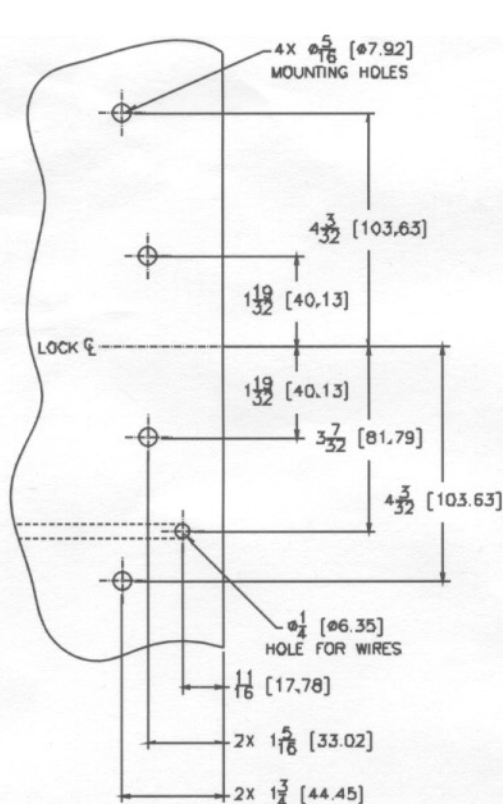


FIGURE 1

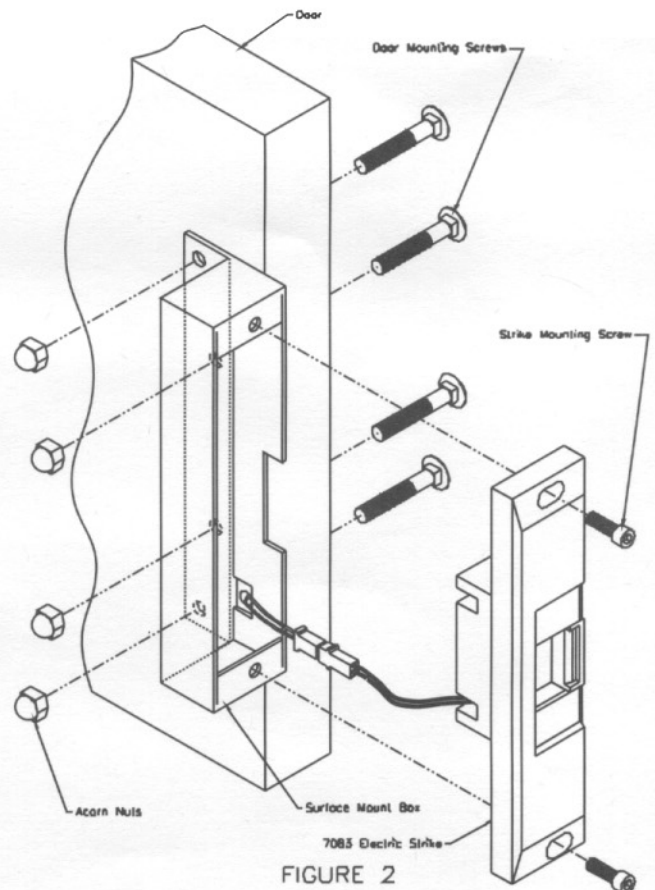


FIGURE 2

**NOTE: Drawings are not to scale. This information is subject to change without notice.
For questions, consult HES technical service helpline, 800-626-7590.**